

CG30



mechanical characteristics

Grinding	
angles	from 0 to 90°
truncature without disassembling the collet holder	
Grinding wheel	
abrasive	corundum
fixing by nut - quick change	
protection housing	
rotation speed	10000 r.p.m.
Collets	
diameters of the collets available	3.00 to 6.35 mm
Packaging	
net weight	10.5 kg
gross weight	12 kg
dimensions	415 x 335 x 270 mm



optional accessories

- collets diameters 3.00 - 3.17 - 4.00 - 4.36 - 6.00 - 6.35 mm
- diamond tipped grinding wheel
- measurement microscope



Gravograph




信發國際發展有限公司
Xinfa International Ltd

香港九龍新浦崗大有街34號新科技廣場15樓11室
Unit 1511, New Tech Plaza, 34 Tai Yau Street,
Sanpokong, Kowloon, Hong Kong
Tel : (852) 2363 7277
Fax : (852) 2363 7767
info@hkgravograph.com
www.hkgravograph.com

grinding machine

CG30

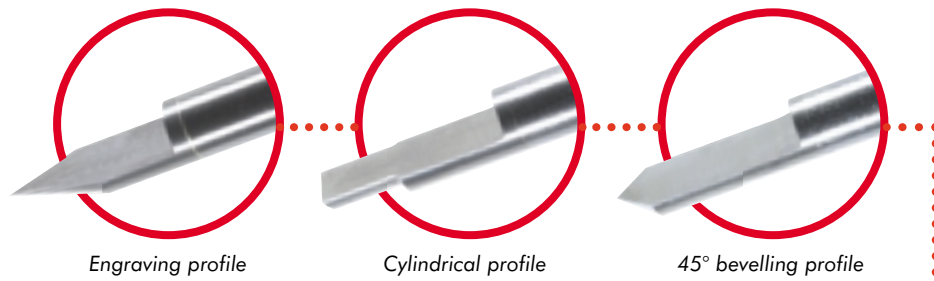

- **Reliability and Quality.** The CG 30 grinding machine benefits from Gravograph's high standard of manufacture and knowledge.
- **Compact,** CG 30 requires minimal workspace.
- **Easy to use.** CG 30 enables the grinding of all cutters either conical cylindrical with flat ends.
- **Ergonomic.** CG 30 reduces the number of manipulating and eliminates the risks of errors.
- The cutter is **automatically positioned** thanks to the guiding tool.
- The principal **cutting angles** are **selected** thanks to the graduated index.
- A preset index indicates automatically the cutter position for the realisation of the **truncature without disassembling the cutter holder.**
- **Absolute safety.** CG 30 ' protection guard ensures optimum protection.
- **Clean.** The incorporated dust extractor allows collection of the dust particles.
- **A series of collets** for the grinding of cutters (3.17, 4.36 & 6.35 mm).



Guiding tool



Graduated index



"T" index for truncature